

Mobile Lift Table

Capacity 150~800kg

BX Series add the value of mobility to a table

Manually Operated Model



The BX15 handle is collapsible.



BX15

BX15W

Model	Maximum Capacity (kg)	Table Dimensions WidthXLength (mm)	Table Height (mm)	Total Height (mm)	Total Width (mm)	Total Length (mm)	Wheels	Adjustable Wheels	Pumping Count (Number of Times)	Weight (kg)	Options Hakacell
BX15W	150	500X813	380~1,350	898	500	1,046	φ100 Rubber	Support Wheels	31	93	○
BX15	150	450X700	215~733	798	450	854			15	33	○ (3sides)
BX30	300	500X813	290~867	898	500	1,008			25	69	○
BX30W	300	518X1,010	433~1,578	961	520	1,270	φ150 Urethane	Support Wheels	64	138	○
BX50	500		438~998	961	520	1,195			50	112	○
BX50SW	500	460X650	419~1,004	940	460	938	φ125 Urethane	Support Wheels	66	102	○
BX80	800	518X1,010	438~998	961	520	1,270	φ150 Urethane	Support Wheels	67	115	○

Battery Powered Model

Lift and lower using dial Speed is adjustable



Battery charger installed



BX50B

BX30WB

Model	Maximum Capacity (kg)	Table Dimensions WidthXLength (mm)	Table Height (mm)	Total Height (mm)	Total Width (mm)	Total Length (mm)	Wheels	Adjustable Wheels	Lifting Time (sec)	Lifting Count (Number of Times)	Battery	Weight (kg)	Options Hakacell
BX15WB	150	500X813	380~1,380	890	500	1,072	φ100 Rubber	Support Wheels	10	110	12V/18AHX2 (Shielded)	129	○
BX30B	300		290~860						9				
BX30WB	300	518X1,010	430~1,600	954	520	1,264	φ150 Urethane	Support Wheels	13	100	12V/26AHX2 (Shielded)	183	○
BX50B	500		440~1,015						11				
BX80B	800	440~1,000	15	100	163	○							

Examples of Use



Mobile Work Positioner

Collapsed Capacity 10~600kg

ESX Series are fully adjustable, weight sensitive, self-leveling, mobile positioners with lifting function



ESX40

ESX21

ESX10

Model	Adjustable Range (kg)	Table Dimensions WidthXLength (mm)	Table Height (mm)	Total Height (mm)	Total Width (mm)	Total Length (mm)	Wheels	Adjustable Wheels	Weight (kg)	Options Hakacell
ESX05	10~50	450X700	262~659	798	450	836	φ100 Rubber	Support Wheels	38	○ (3 sides)
ESX08	20~80		262~650							
ESX10	30~100		262~659							
ESX10L	40~100	500X813	352~787	898	500	998	φ100 Rubber	Support Wheels	62.5	○
ESX21	80~210		352~772							
ESX21L	55~210	518X1,010	374~803	941	520	1,191	φ125 Urethane	Support Wheels	104	○
ESX40	100~400		374~794							
ESX60	220~600		393~813							

Self-Leveling Functions



As the load weight changes, the table either raises or lower, keeping the top of the load at a convenient height.



Fully Adjustable
Weight Selector Pointer travels along weight scale to highlight capacity as knob is turned

Load and Height Chart (Model ESX21)

The above chart shows the ESX21 at a setting of 210Kgs. and 80Kgs.

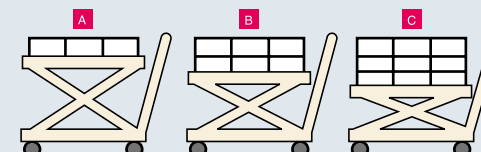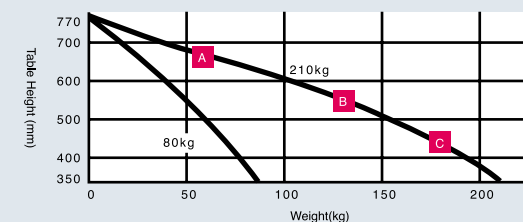

Examples of Use

